



*		144"			<u> </u>	
34RSR48 FRTTOP-48CMD 48"		TGRD48-TGA V48RR FRTTOP-48CMD 48"		34DFS48 FRTTOP-48CMD , 48"		
12"	BB36S 36"	361RB VGT12B VGMT36S 48"		/6B36S 36"	VWT12B	
7 27 7	28	29 / 30 / 30.1		31	32 1	
C&C LH	-GAS	GAS			CBC RH	

GAS CONNECTION #: 1
LOCATED IN ITEM: 27832
PIPE SIZE: 1° NPT
CP HEIGHT: 30" AFF
TOTAL GAS LOAD: 562 MBTU
FEEDS: 30 .1 29 28 3 1
NOTE:(2) Inlets

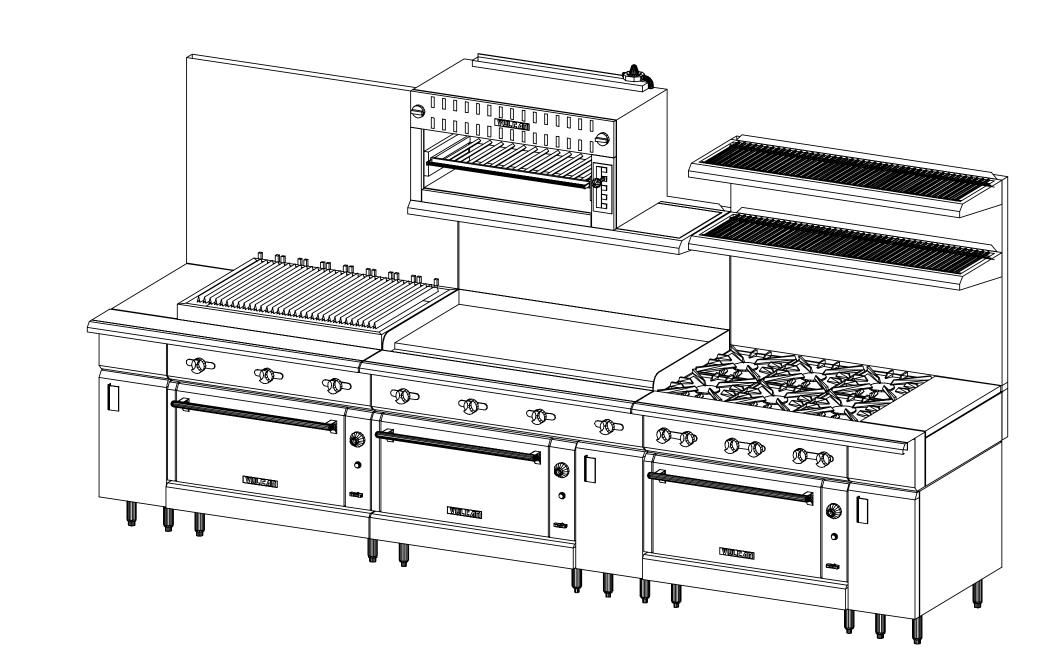

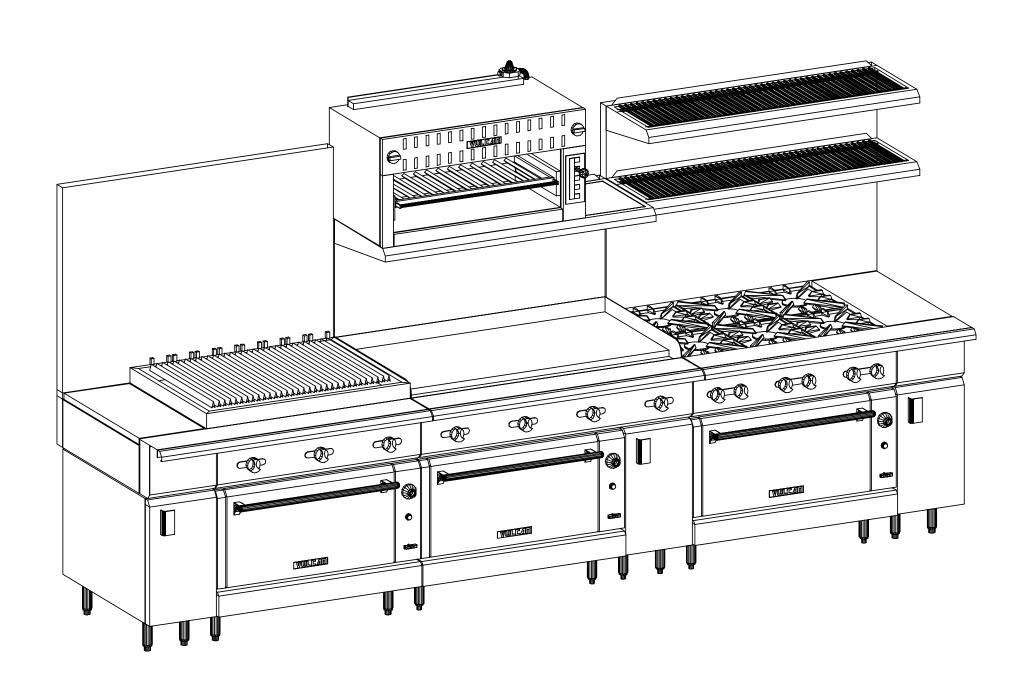

GENERAL NOTES - PLEASE READ

VENTILATION: ALL COOKING EQUIPMENT MUST BE VENTILATED BY AN APPROVED APPLIANCE IN ACCORDANCE WITH ALL APPLICABLE CODES.

FIRE SUPPRIESSION: ALL COOKING EQUIPMENT MUST BE PROTECTED BY AN APPROVED FIRE SUPPRESSION SYSTEM IN ACCORDANCE WITH ALL APPLICABLE CODES.

CONNECTIONS: ALL PIPING, FITTINGS, AND INTERCONNECTION SERVICES SHOWN ARE TO BE SUPPLIED AND INSTALLED BY LICENSED CONTRACTORS IN ACCORDANCE WITH ALL LOCAL CODES.

GAS CONNECTIONS:
EXTERNAL GAS REGULATORS, FLEXIBLE GAS LINES AND RESTRAINING CABLES PROVIDED WITH THE EQUIPMENT MUST BE INSTALLED BY LICENSED CONTRACTORS IN ACCORDANCE WITH ALL LOCAL CODES. INCOMING GAS MANIFOLD SUPPLY PRESSURE MUST NOT EXCEED 0.5 PSI (14" W.C.)

BY OTHERS: VERIFY ALL EQUIPMENT LISTED AS BY OTHERS FOR SIZE AND MECHANICAL SERVICE REQUIREMENTS.

NOTE: IN LINE WITH THE POLICY TO CONTINUALLY IMPROVE ITS PRODUCTS, THE MANUFACTURES RESERVE THE RIGHT TO CHANGE MATERIALS AND SPECIFICATIONS WITHOUT NOTICE.

03-30-2020 03-02-2022 : |0:58:58a 03-02-2022 : ||:0|:23a

4	CONNECTION	POINT
(c)	COLD WATER	

H HOT WATER
HOT + COLD
WATER

D DRAIN

POWER

SWITCH

CORD SET

C CONV OUTLET RECP

DUPLEX RECPTACLE

SINGLE RECPTACLE

GAS
(SS) STEAM SUPPLY
(CR) STEAM RETURN

ST STEAM TAKE OFF

VE EXHAUST VENT

VS SUPPLY VENT

RF REFRIGERATION

PROJECT CODE

THE VULCAN HART COMPANY
RALTIMORE, MARYLAND

Marriott Mox Williamsburg,

1

AS NOTED

DATE: <u>03-30-202</u>0

DRAWN BY: DDB

913 WEST S ANNAPOLIS,

DESIGN