



1	1	EΑ	VGT18	3B	GRIDDL	Ξ			
	30	MBT	U 1.a	25	MAN:	IFOLD			
2	1	EΑ	V6B36	S	RANGE				
2	260	MBT	U 1.a	25	32 /	AFF			
3	1	ΕA	36RB		SALAMAI	NDER	WA	LL I	TNUON
	50	MBT	U Ø.7	75	INT	ER PLUM	В		
	1	ΕA	V36RF	₹	RISER		FL	UE I	TNUON
	1	EΑ	FRTT	DP-WL	DWELDED	FRONT	TOP	54	WIDE

GAS CONNECTION #: 1
LOCATED IN ITEM: 2
PIPE SIZE: 1.25 NPT
CP HEIGHT: 32' AFF
TOTAL GAS LOAD: 340 MBTU
INCLUDES ITEMS: 3 2 1
NOTE:

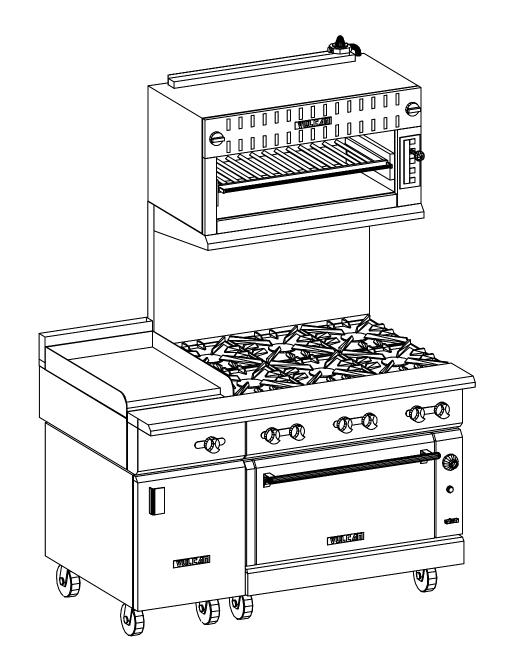

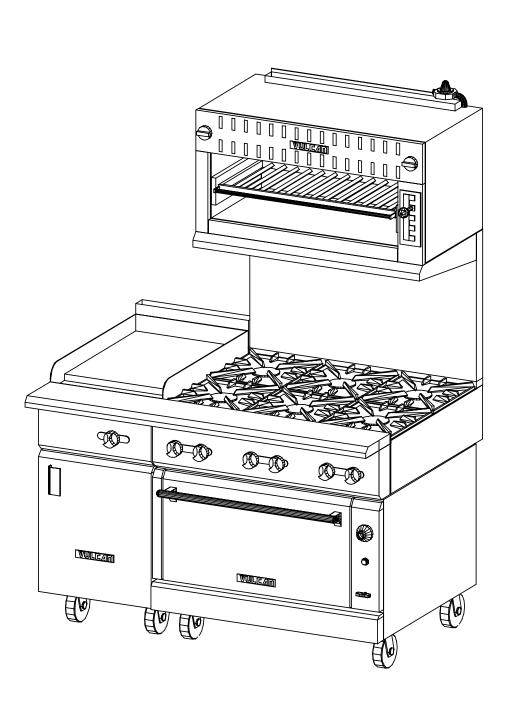

GENERAL NOTES - PLEASE READ

VENTILATION: ALL COOKING EQUIPMENT MUST BE VENTILATED BY AN APPROVED APPLIANCE IN ACCORDANCE WITH ALL APPLICABLE CODES.

FIRE SUPPRIESSION: ALL COOKING EQUIPMENT MUST BE PROTECTED BY AN APPROVED FIRE SUPPRESSION SYSTEM IN ACCORDANCE WITH ALL APPLICABLE CODES.

CONNECTIONS: ALL PIPING, FITTINGS, AND INTERCONNECTION SERVICES SHOWN ARE TO BE SUPPLIED AND INSTALLED BY LICENSED CONTRACTORS IN ACCORDANCE WITH ALL LOCAL CODES.

GAS CONNECTIONS:
EXTERNAL GAS REGULATORS, FLEXIBLE GAS LINES AND RESTRAINING CABLES PROVIDED WITH THE EQUIPMENT MUST BE INSTALLED BY LICENSED CONTRACTORS IN ACCORDANCE WITH ALL LOCAL CODES. INCOMING GAS MANIFOLD SUPPLY PRESSURE MUST NOT EXCEED 0.5 PSI (14" W.C.)

BY OTHERS: VERIFY ALL EQUIPMENT LISTED AS BY OTHERS FOR SIZE AND MECHANICAL SERVICE REQUIREMENTS.

NOTE: IN LINE WITH THE POLICY TO CONTINUALLY IMPROVE ITS PRODUCTS, THE MANUFACTURES RESERVE THE RIGHT TO CHANGE MATERIALS AND SPECIFICATIONS WITHOUT NOTICE.

HOT + COLD WATER D DRAIN POWER \$\ SWITCH CORD SET ©≠ CONV OUTLET RECP DUPLEX RECPTACLE

CONNECTION POINT

C COLD WATER

(H) HOT WATER

SINGLE RECPTACLE (SS) STEAM SUPPLY CR STEAM RETURN

ST STEAM TAKE OFF VE EXHAUST VENT VS SUPPLY VENT RF REFRIGERATION

09-15-2021

PROJECT CODE **TULAS**

ALBUQUERQUE

DATE: <u>09/15/2021</u>

DRAWN BY: DDB

VH-TULAS