





Sala


5' 120V POWER CORD FOR EACH REFRIGERATED BASE 9' 120V POWER CORD FOR OVEN

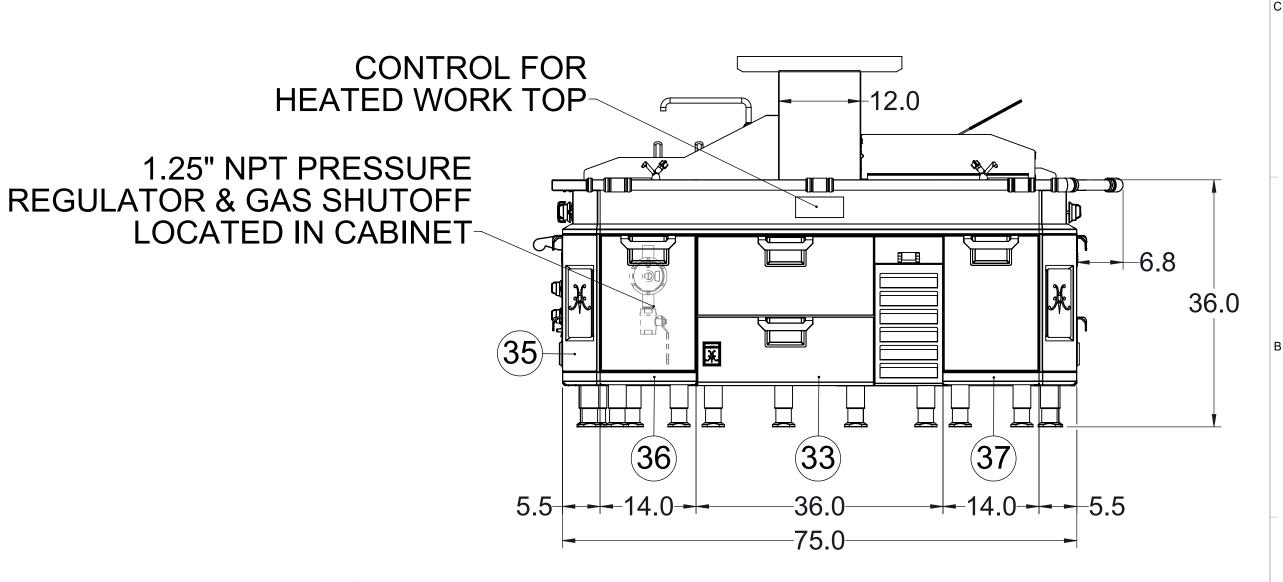


GENERAL NOTES:


- 1. EACH GAS RANGETOP UNIT TO HAVE 1.25" FRONT MANIFOLD WITH OPTIONAL UNIONS FOR COUPLING TO ADJACENT RANGETOP UNITS OR OPTIONAL CAPS AT BOTH ENDS. EACH GAS RANGETOP UNIT TO HAVE OPTIONAL 1" MALE NPT REAR GAS CONNECTION OR REAR CONNECTION PLUGGED AT THE MANIFOLD. 2. EACH GAS OVEN UNIT TO HAVE OPTIONAL .75" MALE NPT REAR GAS CONNECTION OR TO BE INTERPLUMBED TO RANGETOP MOUNTED GAS UNITS.
- 3. MUST MAINTAIN A MINIMUM GAS SUPPLY OF 7" W.C. FOR NATURAL GAS AND 11" W.C. FOR LIQUID PROPANE. GAS SUPPLY MUST MATCH PIPE SIZE OF CONNECTION SHOWN ON DRAWINGS. ALL GAS UNIT'S MANIFOLD PRESSURE IS TO BE REGULATED TO 5" W.C. FOR NATURAL GAS AND 10" W.C. FOR LIQUID PROPANE. SHUTOFF VALVE MUST BE INSTALLED UPSTREAM OF REGULATOR. REGULATOR MUST BE INSTALLED HORIZONTAL, UPRIGHT AND IN ACCORDANCE WITH LOCAL REGULATIONS. 4. ELECTRICAL DATA SHOWN ON DRAWING FOR REQUIRED EQUIPMENT.
- 5. INSTALLATION UNDER AN EXHAUST HOOD IS REQUIRED.
- 6. SHELVES/SAMALANDERS/CHEESEMELTERS MUST NOT BE INSTALLED ABOVE FRYERS/PASTA COOKERS/CHARBROILERS.

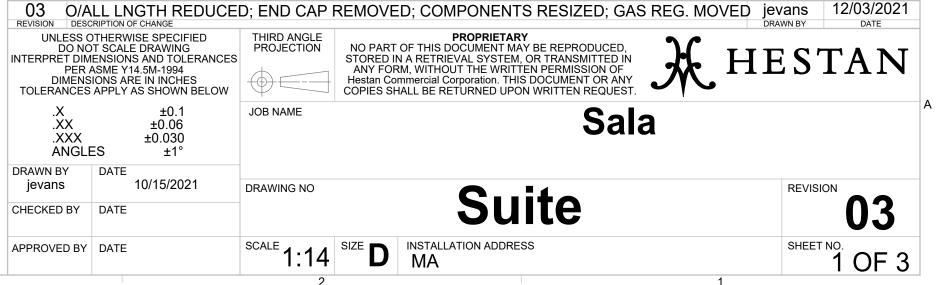

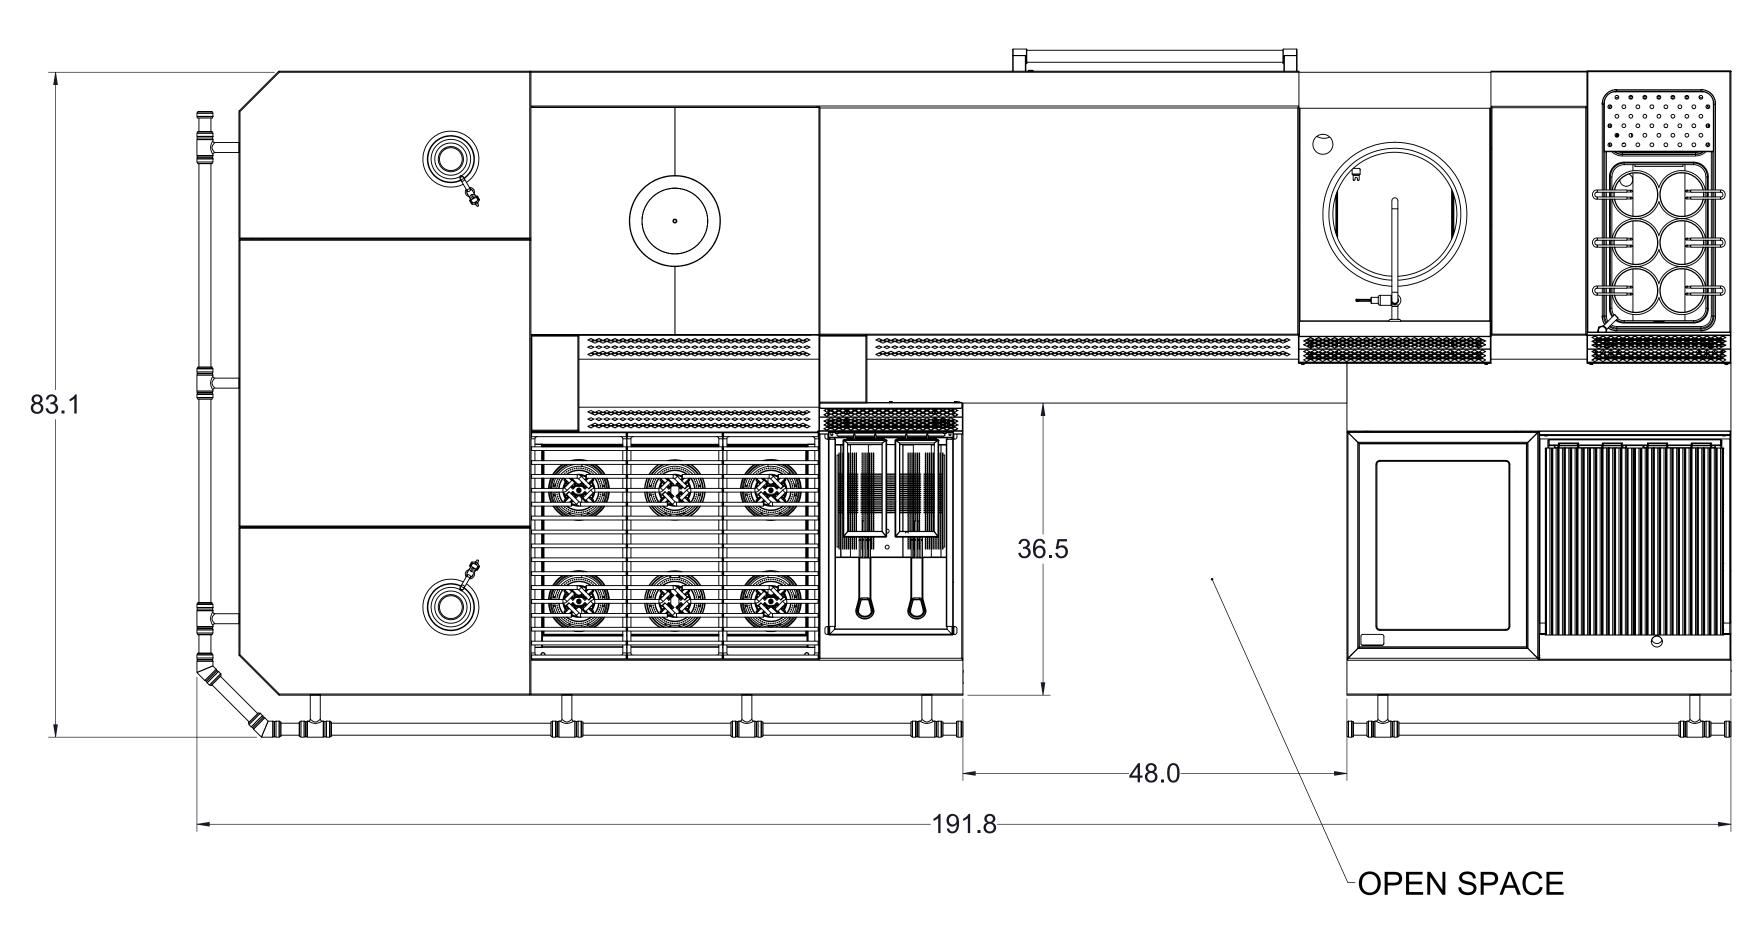


OVERSHELF OMITTED FROM TOP VIEW FOR CLARITY

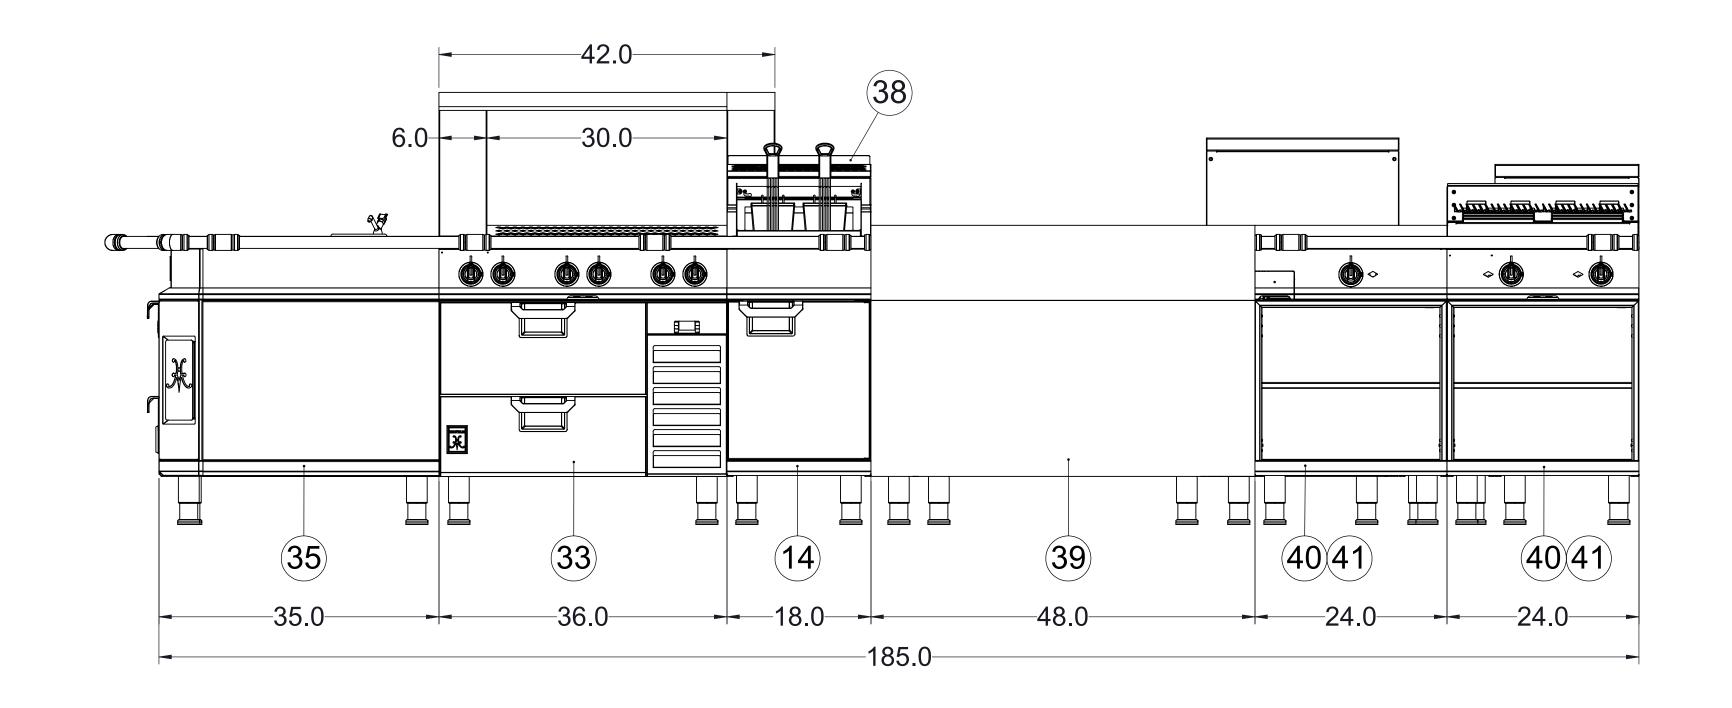

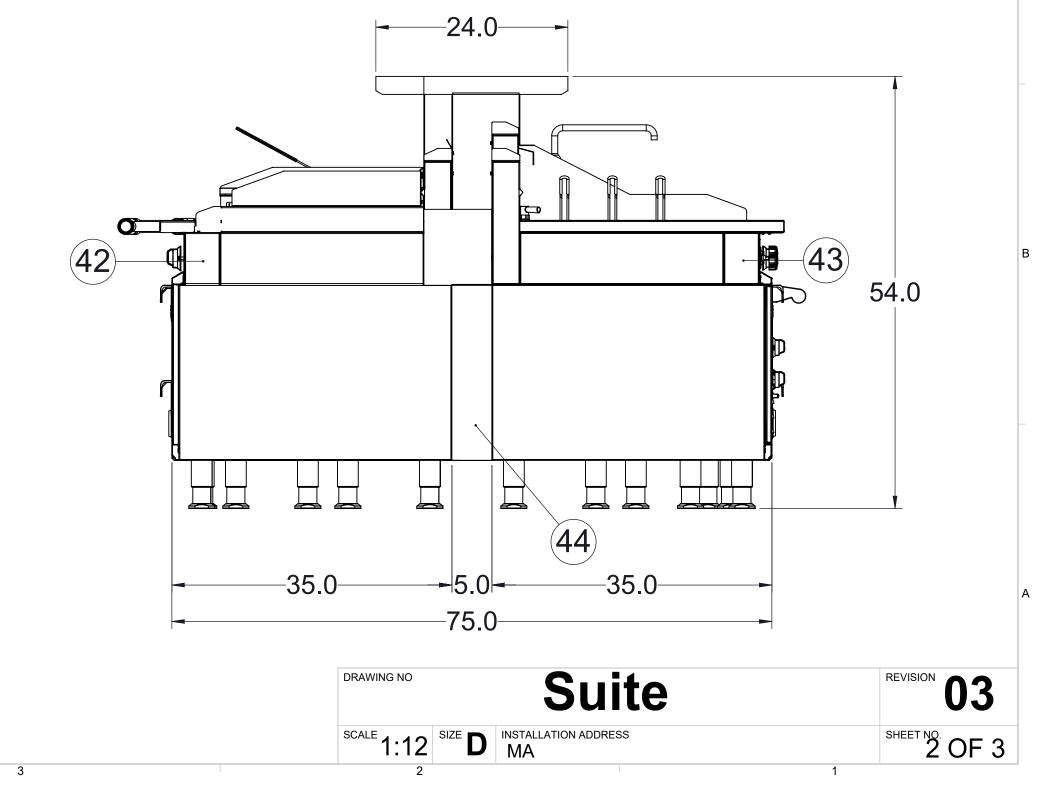

Sala



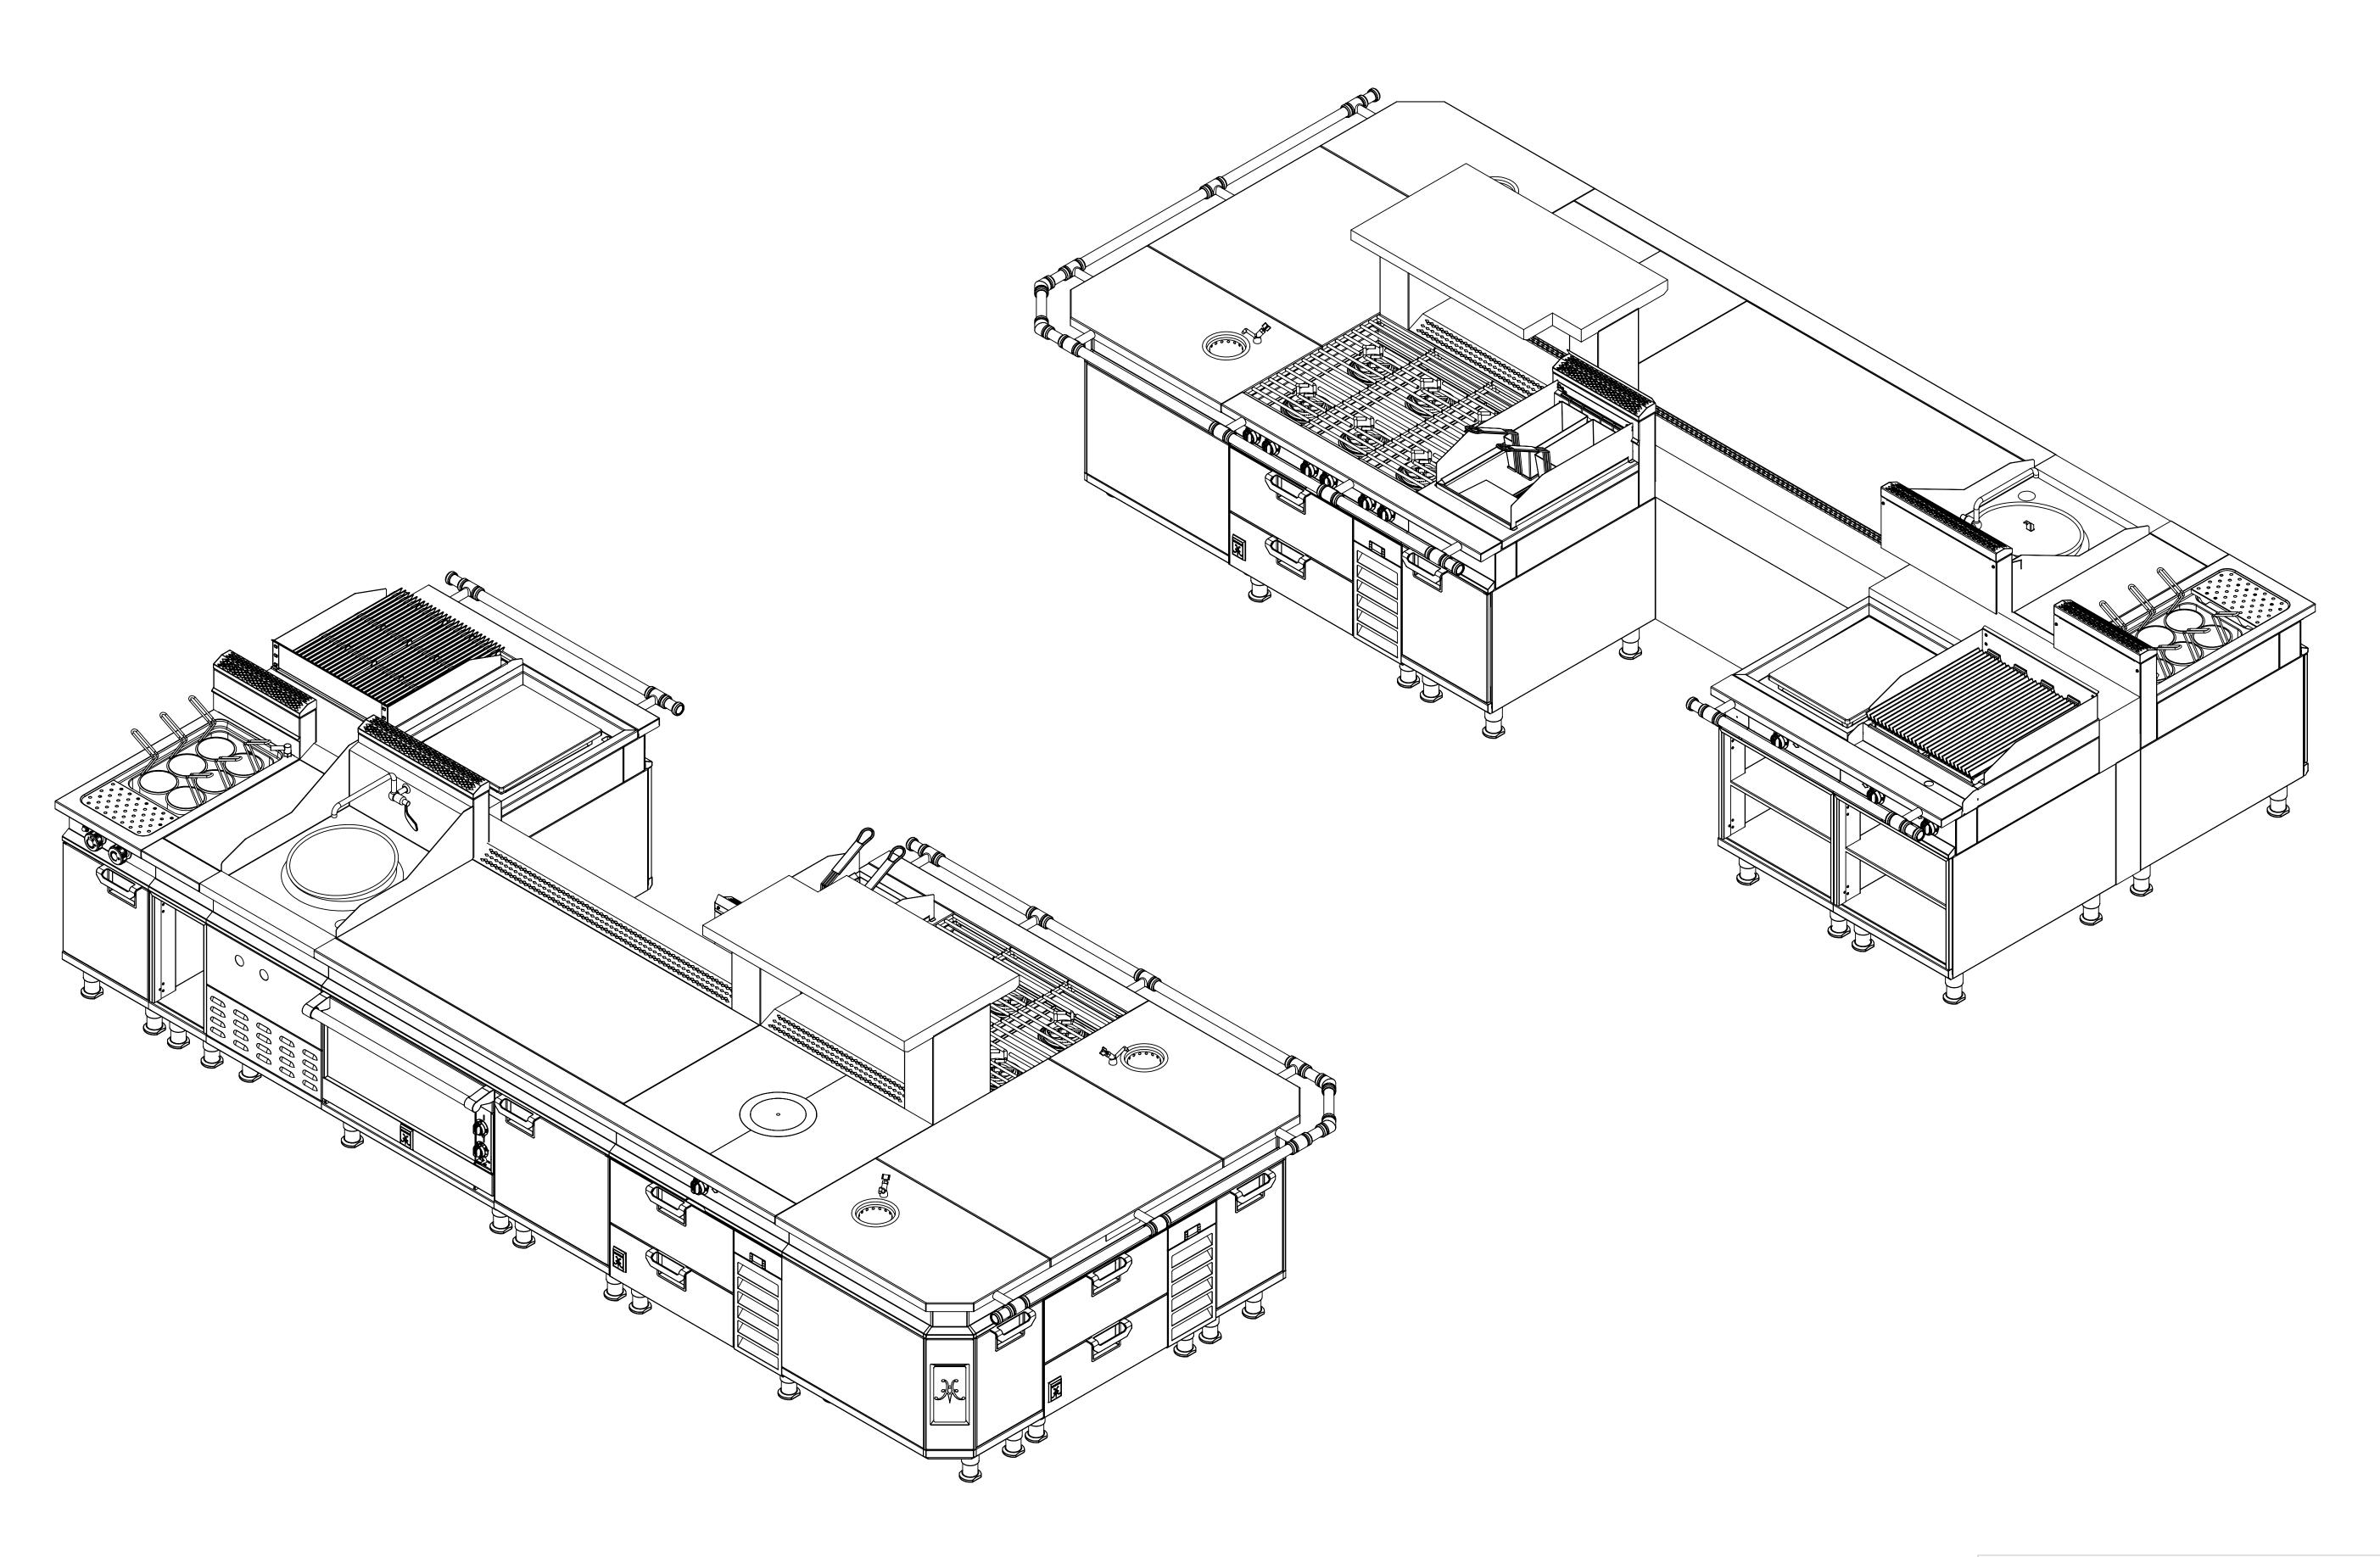

Scale 1:12 SIZE D INSTALLATION ADDRESS MA

SCALE 1:12 SIZE D INSTALLATION ADDRESS MA

1 SHEET NO. 3 OF 3